


KT-26 (TO-92)

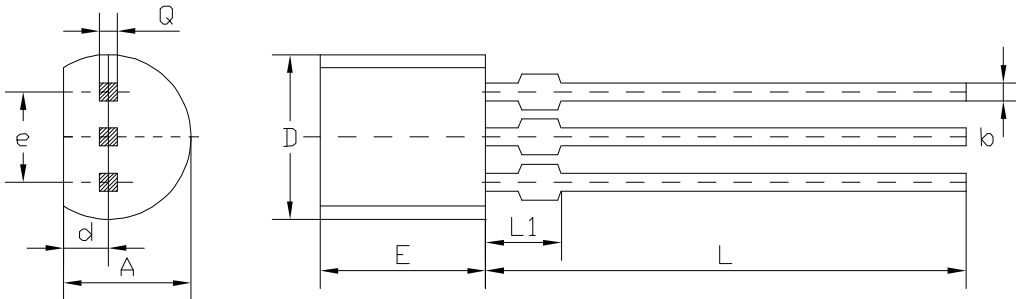

Dimension	mm	
	min	max
E	4.6	5.1
b		0.5
D	4.6	5
d	1.25	1.65
A	3.5	3.8
e	1.2573	1.2827
L	12.5	14.5
L1		2
Q		0.5