


KT-28-2 (TO-220AB)

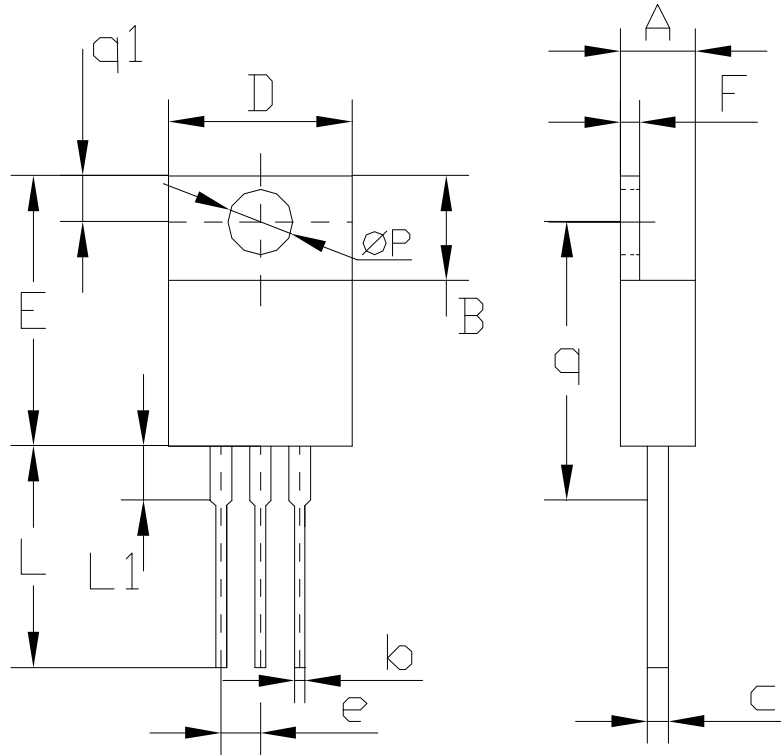

| Dimension | mm | |
|-----------|--------|--------|
| | min | max |
| A | 4.2 | 4.8 |
| B | 5.9 | 6.8 |
| b | 0.6 | 0.8 |
| c | 2.3 | 2.6 |
| D | 10.3 | 10.7 |
| E | 15.2 | 15.9 |
| e | 2.2 | 2.6 |
| F | 1.1 | 1.2 |
| L | 12.5 | 14.5 |
| L1 | 3.06 | 3.54 |
| P | 3.6 | 3.72 |
| Q | 0.55 | 0.75 |
| q | 15.785 | 16.215 |
| q1 | 2.6 | 3 |